

SEPARATION PROCESSES

ADEX CARTRIDGE WIRE WRAPPED OR SINTERED

ADEX CARTRIDGE WIRE WRAPPED OR SINTERED

ADEX CARTRIDGE FILTER HOUSING



Material

- STAINLESS STEEL AISI 304
- OPTIONAL STAINLESS STEEL AISI 316L

Max working pressure 100 Psi (7 bars)

Polished or shotblasted external surface

Material polypropylene
 Length 10 - 20 - 30 - 40 inches
 Porosity 1 - 5 - 10 - 25 microns

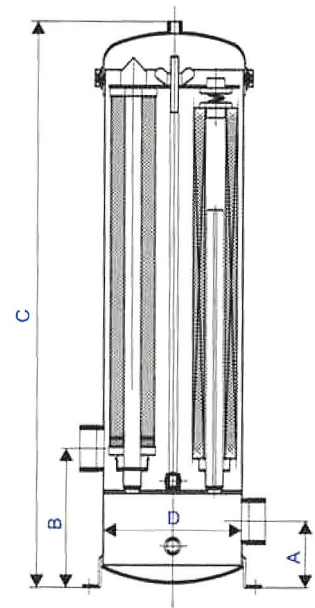

Standard specifications

Model	A	B	C	D	E	F	In/Out	Drain
ADEX N3L1	120	220	600	Ø 170	Ø 216	230	1" -1 1/2"	1/4" -1/2"
ADEX N3L2	120	220	850	Ø 170	Ø 216	230	1" -1 1/2"	1/4" -1/2"
ADEX N3L3	120	220	1100	Ø 170	Ø 216	230	1" -2"	1/4" -1/2"
ADEX N3L4	120	220	1350	Ø 170	Ø 216	230	1" -2"	1/4" -1/2"
ADEX N5L1	120	220	610	Ø 200	Ø 248	260	1" -1 1/2"	1/4" -1/2"
ADEX N5L2	120	220	860	Ø 200	Ø 248	260	1" -1 1/2"	1/4" -1/2"
ADEX N5L3	120	220	1100	Ø 200	Ø 248	260	1" -2"	1/4" -1/2"
ADEX N5L4	120	220	1360	Ø 200	Ø 248	260	1" -2"	1/4" -1/2"
ADEX N7L1	120	220	620	Ø 250	Ø 310	310	1 1/2" -2"	1/2"
ADEX N7L2	120	220	870	Ø 250	Ø 310	310	1 1/2" -2"	1/2"
ADEX N7L3	120	220	1120	Ø 250	Ø 310	310	1 1/2" -2 1/2"	1/2"
ADEX N7L4	120	220	1370	Ø 250	Ø 310	310	1 1/2" -2 1/2"	1/2"

N= number of installed cartridges
 L= cartridges length (x 10")